

## Product Technical Data

**GUILBERT EXPRESS**  
Le Pérípole, Lot 209-210  
33 avenue du Maréchal de Lattre de Tassigny  
94127 Fontenay sous Bois Cedex - France  
Tel.: + 33 1 53 99 16 98 - Fax : + 33 1 53 99 16 56

Gas cartridge - 2400	
Created on	24/12/2009
Modified on	17/02/2022
Issue	E

**Ref.:** 2400  
**Name :** XPRESS GAS

**Product :** Gas cartridge  
**Activity :** Plumbing / Air conditioning  
**User :** Professionals  
**Energy :** Gas

### Description

**Propylene**

**Net gas weight : 400 g**

**1L steel case with safety valve**

**Screw valve to American standard**

1" - 20 threads per inch (60°)


**Can be used in all seasons between - 20 °C and + 49 °C.**

**Manufacturing batch marking**

The marking is located on the the cartridge neck  
(Date, hour)

### Recommendations for use

Disposable, non-refillable cartridge.  
Keep away from direct sunlight.  
Do not expose to temperatures above 50 °C.  
Store in a dry and well ventilated place.

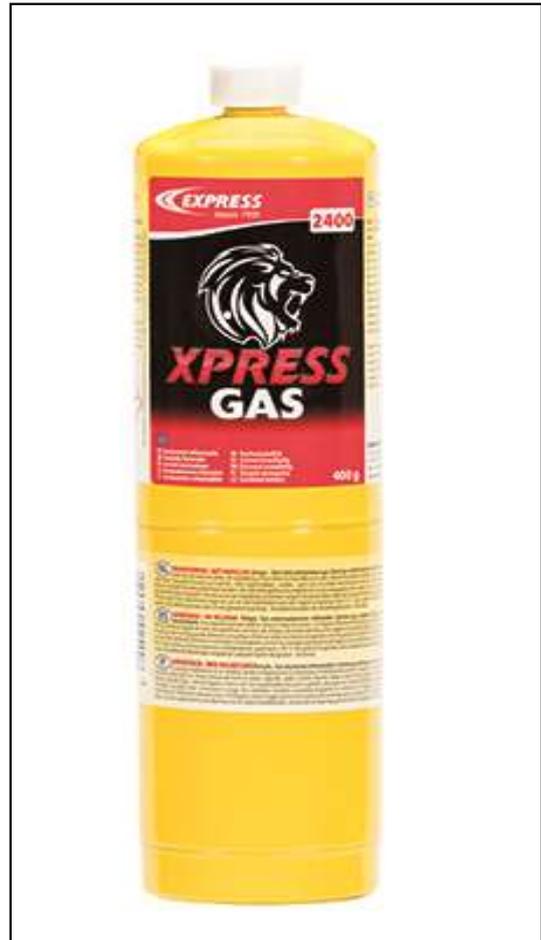

### Packaging

	Weight	Width (mm)	Depth (mm)	Height (mm)
<b>Gas cartridge Ref. 2400</b>	880	Dia. 72	NA	270
<b>Cardboard box : 12 gas cartridges Ref. 2400</b>	10.60 kg	300	235	290
<b>Pallet : 52 Cardboard boxes (624 gas cartridges)</b>	580 kg	1200	800	1310

**Bar code : 3189640 024007**

### Regulation

**Safety Data Sheet**

**SDS No. 009**

### Transport information

**For any transport-related information : refer to the product Safety Data Sheet :**

<http://www.express-fds.fr>

**IMPORTANT: Read instructions before use.**

GUILBERT EXPRESS reserves the right to change product characteristics without previous notice.

Actual products may differ from photographs.

[www.guilbert-express.net](http://www.guilbert-express.net)