

Product Technical Data

GUILBERT EXPRESS

Le Péripole, Lot 209-210

33 avenue du Maréchal de Lattre de Tassigny

94127 Fontenay sous Bois Cedex - France

Tel.: + 33 1 53 99 16 98 - Fax : + 33 1 53 99 16 56

Piezo gas torches 360 / 365	
Created on	10/01/02
Modified on	05/12/11
Issue	B

Ref.: **6360 - 360 -
6365 - 365**

Name: **Piezo gas torches**

Products: Piezo gas torches

Activity: Plumbing

User: Professional

Energy: Gas

Description

Handle with 3/8"G union and piezo ignition

Ref. 360 and 6360

Burner with piezo ignition
Turbo burner for brazing tubes up to dia.40 mm
Nozzle dia.: 18 mm


Ref. 365 and 6365

Burner with piezo ignition
Turbo burner for brazing tubes up to dia. 24 mm
Nozzle dia.: 24 mm

Supply pressure: 4 bar

Application fields

Plumbing, tin soldering, brazing, etc.

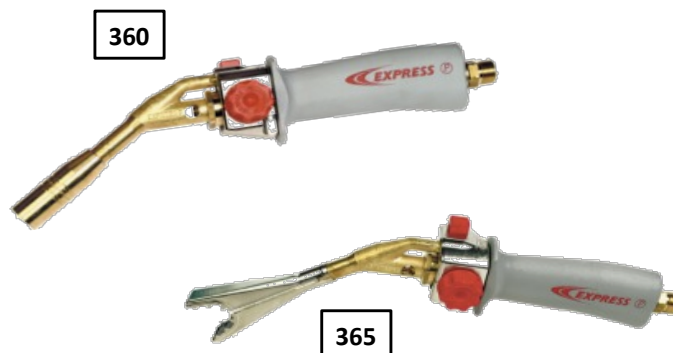

Technical features

	At 2 bar			At 4 bar		
	Flow g/h	Power		Flow g/h	Power	
		kW	BTU		kW	BTU
All references	250 g/h	3.5 kW	11,950 BTU	415 g/h	5.7 kW	19,620 BTU

Standard composition

Ref.	Description	Weight (bare)
360	Handle with 3/8"G swivel union + Turbo burner	710 g
365	Handle with 3/8"G swivel union + Cercoflam burner	695 g
6360	Handle with 3/8"G swivel union + Turbo burner + hose 4.75 m long (Ref. 963/5) + 1 regulator 4 bar (Ref. 684) in shoulder strap bag	1465 g
6365	Handle with 3/8"G swivel union + Cercoflam burner + hose 4.75 m long (Ref. 963/5) + 1 regulator 4 bar (Ref. 684) in shoulder strap bag	1450 g

Materials

Tip: Copper, 99.9% pure
Burner: Corrosion resistant semisteel
Venturi : inox
Valves and fittings: Brass

Spare parts

Injector Ref. 27107
Turbo nozzle Ref. 15359
CercoFlam nozzle Ref. 23750
Piezo kit Ref. 16150

Designed as per

NF EN 731

IMPORTANT: Read instructions before use - Use only in well ventilated areas.

GUILBERT EXPRESS reserves the right to change product characteristics without previous notice. Non-contractual photos.

www.guilbert-express.net